


Product data sheet

Cable



Product description	Contacts: 3 wires, shielded, Standard, PVC, grey (RAL 7000), 3 x 0.34 mm², 100 m
Area	Shielded cable
Part no.	08 3089 000 000

Illustration

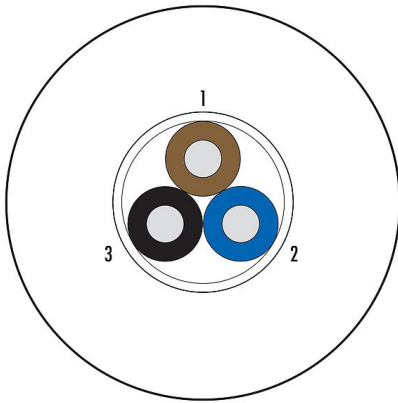

Technical data

General features

Part no.	08 3089 000 000
	Alternative part no.: 52 0606 000
Cable length	100 m (Other lengths are available on request.)
Version	Raw cable
Weight (g)	4102.00
Customs tariff number	85444995
Country of Origin	DE

Electrical parameters

EMC compliance	shielded
----------------	----------

Material

REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

Classifications

eCl@ss 11.1	27-44-01-90
ETIM 9.0	EC002638

Cable data - Structure of the cable

Cable type	Standard
Cable diameter	5.0 mm

Product data sheet

Cable



Product description **Contacts: 3 wires, shielded, Standard, PVC, grey (RAL 7000), 3 x 0.34 mm², 100 m**

Area **Shielded cable**
Part no. **08 3089 000 000**

Cross section	3 x 0.34 mm ²
Sheath material	PVC
Single-lead insulation	PVC Y18 (105 °C) according to UL1731
Single-lead structure	42 x 0.10 mm
Cable color	grey (RAL 7000)

Cable data - Electrical properties

Cable Insulation resistance	> 100 Ω/Km
Operating voltage	≤ 300 V
Cable test voltage	≥ 2500 V effective
Conductor resistance	57 Ω/Km (20°C)

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	> 2 million
Permitted acceleration	max. 5 m/s ² + 1 m/s ²
Travel distance, horizontal	at 5 m/s ² -> 5 m
Travel distance, vertical	at 5 m/s ² -> 2 m
Travel speed	≤ 200 m/min (5 m horizontal distance)

Cable data - Thermal properties

Temperature range cable in move from/to	-5 °C / 105 °C (UL +105 °C)
Temperature range cable fixed from/to	-40 °C / 105 °C (UL +105 °C)

Cable data - Other features

Halogen free	no
--------------	----