

Product data sheet

Subminiature connectors




Product description	M9 Male panel mount connector, Contacts: 2, shieldable, THT, IP67, front fastened
Area	M9 IP67
Part no.	09 0403 35 02


Illustration




Conductor layout



Scale drawing



Contact arrangement (Plug-in side)



You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	09 0403 35 02
Connector design	Male panel mount connector
Version	Connector pin straight
Connector locking system	screw
Termination	THT
Degree of protection	IP67
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	10.29

Product data sheet

Subminiature connectors



Product description	M9 Male panel mount connector, Contacts: 2, shieldable, THT, IP67, front fastened
Area	M9 IP67
Part no.	09 0403 35 02

Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current	4.0 A
Insulation resistance	$\geq 10^{10} \Omega$
Pollution degree	1
Overvoltage category	II
Insulating material group	III
EMC compliance	shieldable
Shield connection	Shielding plate

Material


Contact body material	PA (UL94 V-0)
Contact material	CuZn (brass)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	2bd54df8-6e8c-4197-8762-5bda30fe0ba4

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569


Product description	M9 Male panel mount connector, Contacts: 2, shieldable, THT, IP67, front fastened
Area	M9 IP67
Part no.	09 0403 35 02

Assembly instructions / Panel cut-out

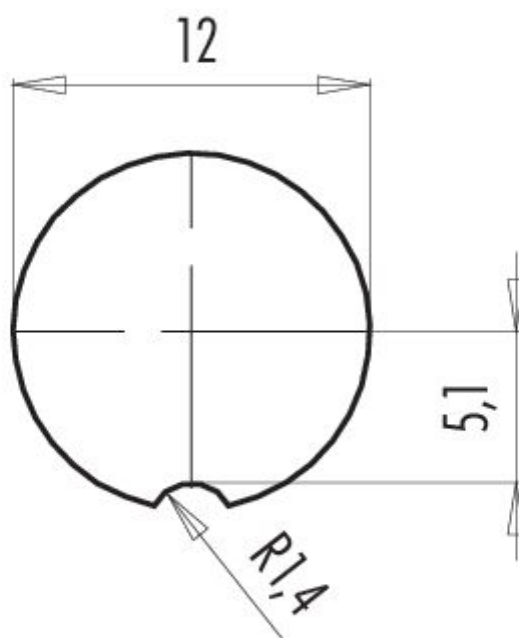

Product description	M9 Male panel mount connector, Contacts: 2, shieldable, THT, IP67, front fastened
Area	M9 IP67
Part no.	09 0403 35 02

Component part drawing

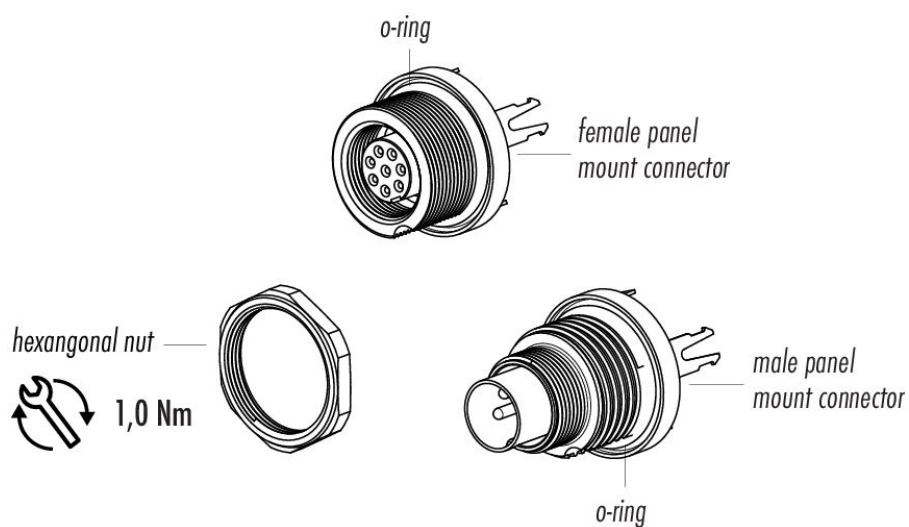

Product description	M9 Male panel mount connector, Contacts: 2, shieldable, THT, IP67, front fastened
Area	M9 IP67
Part no.	09 0403 35 02

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.