

Product data sheet

Automation technology - Data transmission




Product description	M12 Female cable connector, Contacts: 8, 5.5-9.0 mm, shieldable, IDC, IP67
Area	M12-X
Part no.	99 3788 810 08


Illustration



Scale drawing



Contact arrangement (Plug-in side)



shield on housing

You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	99 3788 810 08
Connector design	Female cable connector
Type standard	DIN EN 61076-2-109
Version	Connector socket straight
Connector locking system	screw
Termination	IDC
Degree of protection	IP67
Cross-sectional area	AWG 27-22
Cable outlet	5.5-9.0 mm
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	48.25
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	50 V (AC) / 60 V (DC)
Rated impulse voltage	800 V
Rated current	0.5 A
Pollution degree	3
Transmission rate	CAT 6A
Overvoltage category	II
Insulating material group	II
EMC compliance	shieldable
Shield connection	Shield clamping

Product data sheet

Automation technology - Data transmission



Product description **M12 Female cable connector, Contacts: 8, 5.5-9.0 mm, shieldable, IDC, IP67**

Area **M12-X**
Part no. **99 3788 810 08**

Material

Housing material	Brass nickel-plated / Zinc die-cast nickel-plated
Contact body material	PA
Contact material	CuZn (brass)
Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	acca9673-7397-4d23-bcde-4f7f21176af0


Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

Declarations of conformity


Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
-----------------------	--

Assembly instructions

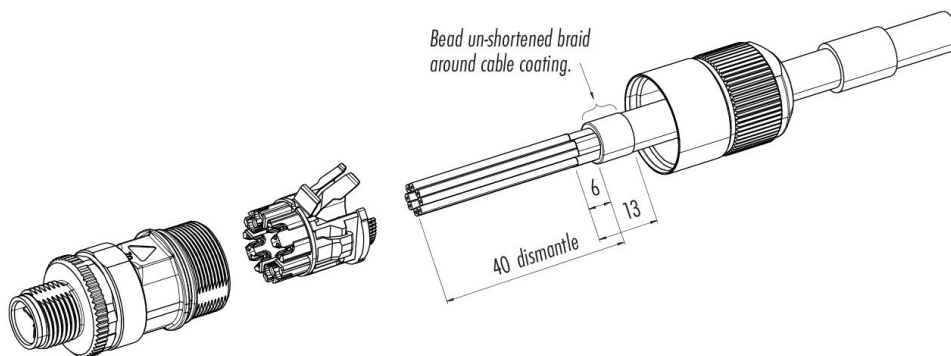

Product description	M12 Female cable connector, Contacts: 8, 5.5-9.0 mm, shieldable, IDC, IP67
Area	M12-X
Part no.	99 3788 810 08

Component part drawing

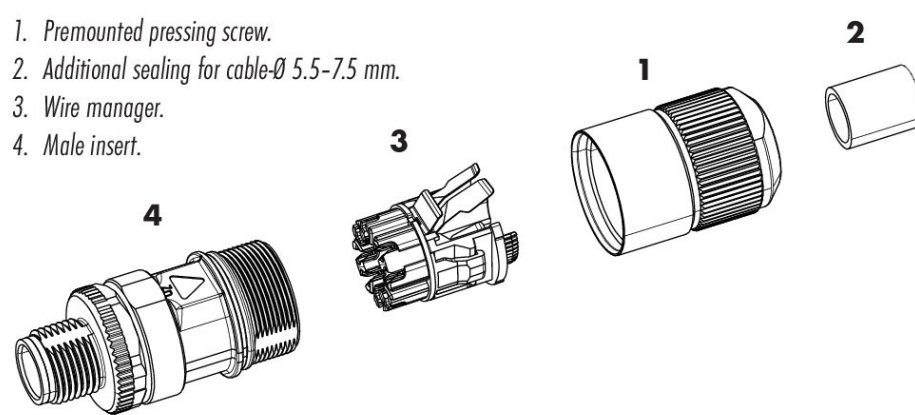

Product description	M12 Female cable connector, Contacts: 8, 5.5-9.0 mm, shieldable, IDC, IP67
Area	M12-X
Part no.	99 3788 810 08

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).