

Product data sheet

Connectors for medical applications




Product description	Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67, VDE
Area	Snap-in IP67, miniature
Part no.	99 9136 70 12


Illustration



Scale drawing



Contact arrangement (Plug-in side)



You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	99 9136 70 12
Connector design	Female panel mount connector
Version	Connector socket straight
Connector locking system	snap-in
Termination	solder
Degree of protection	IP67
Cross-sectional area	max. 0.25 mm ² / AWG 24
Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	6.215
Customs tariff number	85369010

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Rated current	2.0 A
Insulation resistance	≥ 10 ¹⁰ Ω
Pollution degree	2
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	PA
------------------	----



Product data sheet

Connectors for medical applications



Product description	Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67, VDE
Area	Snap-in IP67, miniature
Part no.	99 9136 70 12

Contact body material	PA (UL94 V-0) green
Contact material	CuSn (bronze)
Contact plating	Au (gold)


Authorization/approvals

Approvals	VDE
-----------	-----

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

Assembly instructions / Panel cut-out

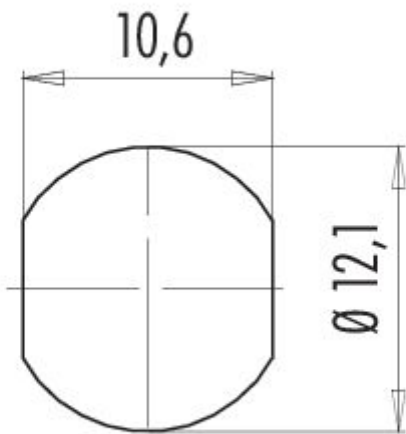


Product data sheet

Connectors for medical applications



Product description	Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67, VDE
Area	Snap-in IP67, miniature
Part no.	99 9136 70 12

Component part drawing

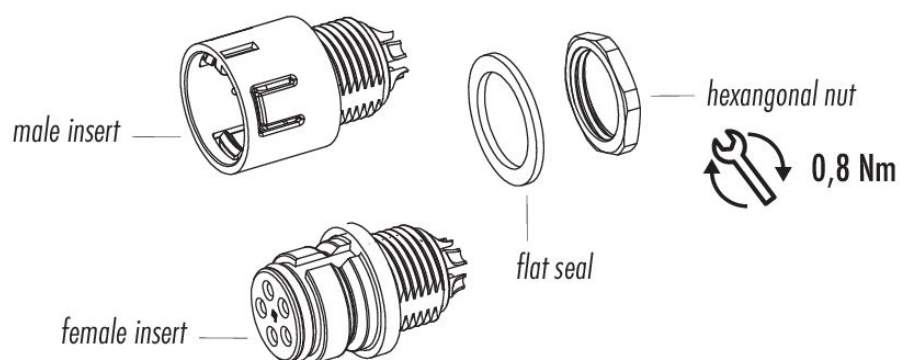

Product data sheet

Connectors for medical applications



Product description	Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67, VDE
Area	Snap-in IP67, miniature
Part no.	99 9136 70 12

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

